




PRODUCT CATALOGUE

高义光电科技有限公司

GAOYI STAGE LIGHTING TECHNOLOGY.,LTD

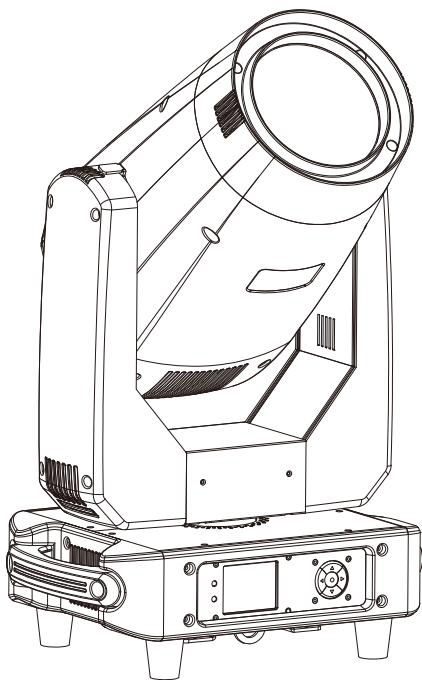

公司简介 About us

Gaoyi Stage Lighting is a manufacturer of professional stage lights in China.

The concept for Gaoyi Lighting was established by a talented and creative group of LED Light Engineers. Because of the love and passion for lighting. They started their career of lighting in 2006. They firmly believe that only by focusing can we be professional.

Nowadays Gaoyi lighting has been highly recognized and recommended by hundreds of both domestic and worldwide customers covering OEM/ODM or branding field. Quality is always the most important insurance in Gaoyi lighting project's continual and progress improvement.

高义光电科技有限公司是一家专业从事舞台灯光及周边设备研发、生产、销售，安装和服务的综合型企业，成立于2006年，创始人是一群有理想，有抱负的工程师，本着对舞台灯光的热爱与执着，开始了他们的灯光生涯。

现如今，高义光电以稳定的品质，完美的工艺，优质的服务赢得了国内外客户的一致推崇与信赖，其产品远销于欧洲、北美、南美和亚洲（包括澳大利亚、新西兰）等地区。

“唯有专注，方可专业。”一直以来都是高义人坚定不移的理念。不断更新新产品，为客户提供优质的售后服务，共建互利双赢！



企业资质：

Quality is always the most important insurance in Gaoyi lighting project's continual , healthy and progressly improvement . Gaoyi lighting management system always insists on th ISO9001 international system of Quality control . CE and ROHS standards。






“

In the future, we in addition to continuous innovation, the development of new varieties of high and new, we will continue to focus on the existing products, further strict material control, strict cost control, strict quality control, to further optimize the after-sales service. At the same time, we are sincerely for the overwhelming majority of customers at home and abroad to provide OEM service!

Gaoyi Stage Lighting, are looking forward to your support! Welcome your joining!




”

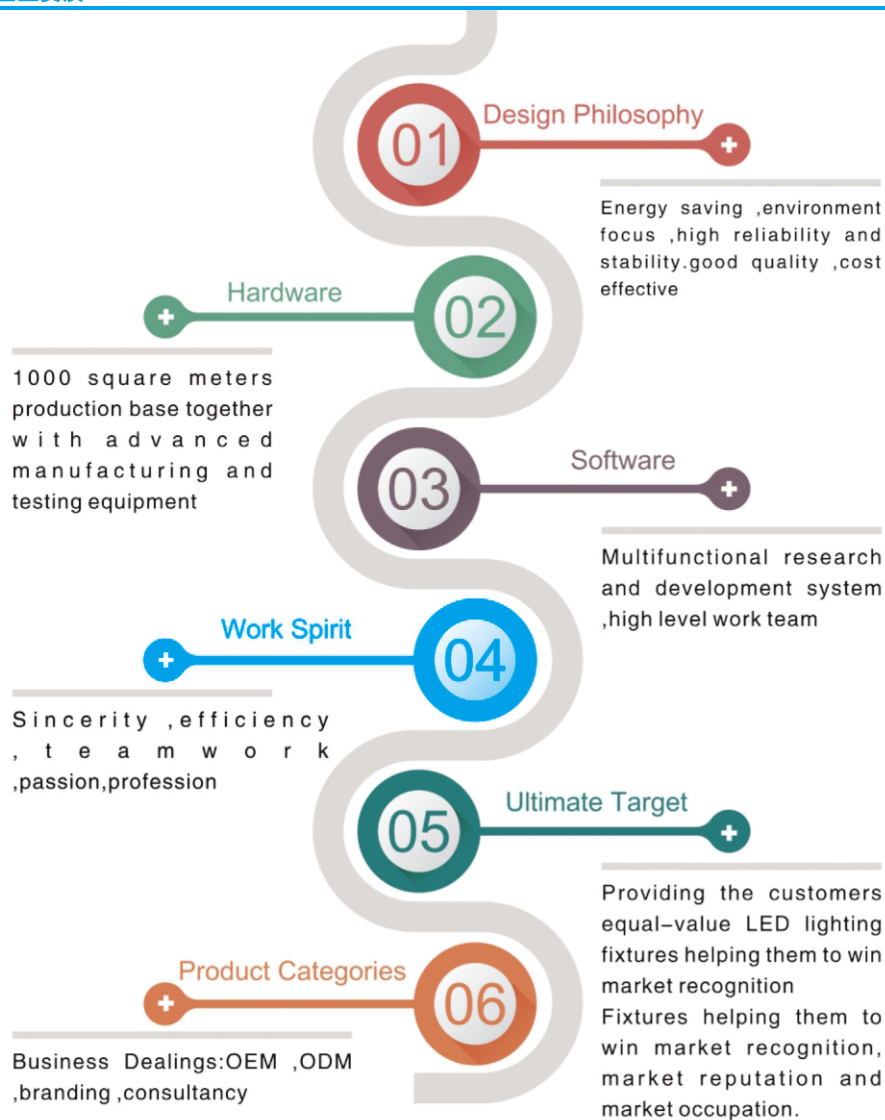



Professional stage lighting equipment
Let us lead you to a green revolution
In stage lighting equipment

W I 4



7X40W WASH ZOOM

Input power: AC100-240V 50/60 Hz

Power consumption: 300W (max)

Connection: 3pin-XLR male/female

Extremely Long Life: 50,000 Hr and low power consumption

LED: 7 PCS 40W high power RGBW LED

DMX channel: 12/18 channels

ZOOM angel: 6-55°

Movement: Pan/Tilt: X axis 540°, Y axis 270°

High speed of pan/tilt movement, speed of pan/tilt movement is adjustable

Control mode: DMX512/Master-Slave/Auto run/sound

Display: LCD display

IP-Rating: IP20

N.W: 8.8 KG

G.W: 10.5 KG

Packing size: 48x37x28cm

7X40W 调焦峰眼

7X40W 调焦蜂眼摇头灯

输入电压: AC100-240V宽电压 50/60 Hz

总功率: 300W

信号连接: 3pin-XLR公/母

光源: LED 7颗40W RGBW 光源寿命50,000小时

DMX通道: 12/18通道

变焦角度: 6-55°

水平/垂直: X轴540°, Y轴270°

移动速度快, 水平/垂直移动速度可调节

控制模式: DMX512 /从机/内置运行/声控激发




显示屏: LCD显示屏

IP评级: IP20

N.W: 8.8 kg

G.W: 10.5 kg

包装尺寸: 48x37x28cm



6X40W+60WFX WASH ZOOM

POWER SUPPLIE

Input power: AC100-240V 50/60 Hz

Power consumption :280W

DMX channel:25 /34 channels

Pan scan: 540°(16bit) Electric correction

Tilt scan: 240° (16bit) Electric correction

Light source: 6X40W RGBW +60W RGBW

Ring :40 pcs x 0.7W LEDs (RGB)

LED ring can present the rainbow effect

Zoom angle:18-50 degree

8-faced prism

Unique effect: Magic kaleidoscope

RDM function

Control mode:DMX512/Master-Slave/Auto run

Over heat protection

Dimmer : 0- 100 %

Strobe:0-20 HZ


Display:LCD display

WEIGHT&SIZE

N.W: 9.3 KG G.W: 11 KG Packing size: 48x37x28cm

6X40W调焦染色+60万花筒

- ◇ 快速的LED 摇头染色灯 ◇ 通道数值: 25 与34
- ◇ 水平/垂直: 540°/240°, 16bit精度扫描
- ◇ 总功率: 300W ◇ 输入电压: AC 100-240 V , 50/60HZ
- ◇ 光源: 6X40W 红绿蓝白+60W 红绿蓝白
- ◇ 灯带: 40颗0.7W 红绿蓝 ◇ 灯带可呈现彩虹效果
- ◇ 一个8棱镜 ◇ 光束角度: 18-50度 ◇ 温控风扇
- ◇ RDM 功能 ◇ 特殊效果: 梦幻万花筒
- ◇ 彩色液晶显示屏, 导航更方便
- ◇ 操作模式: DMX512, 主/从机 ◇ 内置照明下显示主/从模式
- ◇ 外壳: 耐高温工程塑胶+铝合金 ◇ 尺寸: 48x37x28cm
- ◇ 净重: 9.3KG ◇ 毛重: 11KG

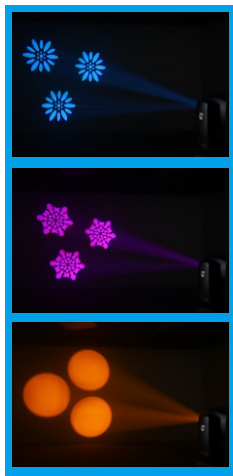

150W LED SPOT

POWER SUPPLIE

Input power: AC100-240V 50/60 Hz

Power consumption :170W

LED source: 1 x 150W LED

DMX channel:16 channels

Pan scan: 540°(16bit) Electric correction

Tilt scan: 270° (16bit) Electric correction

Color wheel: one color wheel, 7 kinds of color chips in one color wheel

Static Gobo: 7gobos+open

Rotation Gobo:6 gobos+open

Beam angle:16 degree

Effect Wheel: one Rotation three-faced prism Frost

RDM function

Effect move , Bi-directional rotation

Lens optical system mechanical focus

Control mode:DMX512/Master-Slave/Auto run

Over heat protection Dimmer : 0- 100 %

Strobe:0-20 HZ




Display:LCD display

WEIGHT&SIZE

N.W: 9.5 KG G.W: 11 KG Packing size: 48x37x28cm

150W图案灯

- ◇ 快速的LED 摇头图案灯。 ◇ 通道数值: 16
- ◇ 水平/垂直: 540°/270°, 16bit精度扫描。 ◇ 总功率: 170W
- ◇ 光源: 单颗150W灯珠
- ◇ 输入电压: AC 100-240 V , 50/60HZ
- ◇ 颜色盘7种颜色+白光 ◇ 固定图案盘7种图案+白光
- ◇ 旋转图案盘6种图案+白光 ◇ 双向旋转3棱镜
- ◇ 温控风扇 ◇ 带雾镜 ◇ RDM 功能
- ◇ 光束角度: 16度 ◇ 彩色液晶显示屏, 导航更方便
- ◇ 操作模式: DMX512, 主/从机 ◇ 内置照明下显示主/从模式
- ◇ 外壳: 耐高温工程塑胶+铝合金
- ◇ 尺寸: 48x37x28cm ◇ 净重: 9.5KG ◇ 毛重: 11 KG



B15



150W LED BEAM

POWER SUPPLIE

POWER SUPPLIE

Input power: AC 100-240V 50/60 Hz

Power consumption : 150W

DMX channel: 13 channels

Pan scan: 540° (16bit) Electric correction

Tilt scan: 270° (16bit) Electric correction

Color wheel: one color wheel, 13 kinds of color chips in one color wheel

Static Gobo: 11 gobos + open

Color chips: 1 colorful chip (7 color)

Beam angle: 3 degree

Effect Wheel: one Rotation 6+12-faced honeycomb prism

RDM function

Lens optical system mechanical focus

Control mode: DMX512/Master-Slave/Auto run

Over heat protection

Dimmer: 0-100 %




Strobe: 0-20 HZ

Display: LCD display

WEIGHT&SIZE

N.W: 9.8 KG G.W: 11.5 KG

Packing size: 48x37x26cm

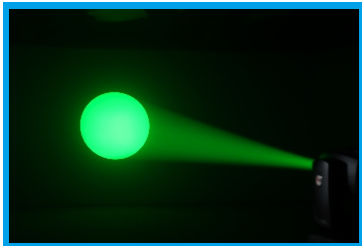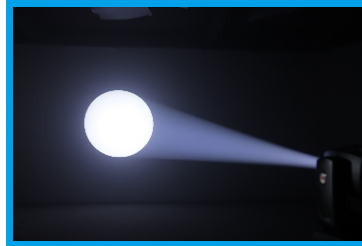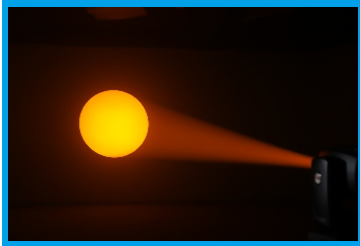

150W 光束灯

- ◇ 快速的LED 摇头光束灯。 ◇ 通道数值: 13
- ◇ 水平/垂直: 540°/270°, 16bit精度扫描。 ◇ 总功率: 150W
- ◇ 输入电压: AC 100-240 V, 50/60HZ
- ◇ 颜色盘13种颜色+白光 ◇ 固定图案盘11种图案+白光
- ◇ 一个七彩镜 ◇ 6+12蜂窝棱镜 ◇ 温控风扇
- ◇ RDM 功能 ◇ 光束角度: 3度 ◇ 彩色液晶显示屏, 导航更方便
- ◇ 操作模式: DMX512, 主/从机 ◇ 内置照明下显示主/从模式
- ◇ 外壳: 耐高温工程塑胶+铝合金 ◇ 尺寸: 48x37x28cm
- ◇ 净重: 9.8KG ◇ 毛重: 11.5 KG

5700



700W BSWF LED Moving heads

Fits a powerful 700W LED engine and its front lens is 180mm diameter

Color Temperature: 7,000K

Linear CMY color mixing

Excellent color macro effect

Variable CTO: 2700K-7000K

Static gobo wheel: 1 static gobo wheel with 8 gobos

Rotating gobo wheel: 1 rotating gobo wheel with 7 gobos, convenient replacement

Color wheel: 1 color wheel with 6 colors

Animation wheel: 1 animation wheel with outstanding water and flame effect, the effect disk can rotate and be replaced

Prisms: 1pc 3-facet prism can rotate in either direction

Beam Angle: 5°-55°

Frost: the frost filters to create and improve the wash effect. They can be used independently and overlaid

Motorized linear Iris

4 x fast and smooth framing shutters; The position and the angle of each shutter blade can be controlled individually; Each shutter blade can block out light completely; The framing module can rotate at ± 60 degrees

Flicker free management

Dust-proof and oil-proof design

Packing size: 90.5x56x45.5CM N.W:38KG G.W :40KG

700W 切割灯

出光镜头直径:180mm

采用强大的700W LED光引擎

线性CTO色温调节(2700K-7000K)

色温: 7000K

切割系统: 4块光栅实现快速、平滑切割, 每块光栅切割方向及角度可以独立控制; 单片可完整闭光, 整个切割模块可以旋转 $\pm 60^\circ$

线性CMY混色系统 卓越的色彩宏效果

色彩丰富的彩虹效果, 可双向旋转

固定图案盘: 1个固定图案盘, 8种固定图案

旋转图案盘: 1个旋转图案盘, 7种旋转图案, 便于替换

颜色盘: 1个颜色盘, 6种固定颜色

配备可双向旋转3棱镜

光束角度: 5°-55° 独立控制的雾化片 杰出的频闪效果, 速度可变 0-100%顺滑调光 防尘、防油污设计

包装尺寸: 90.5x56x45.5CM 净重:38KG 毛重:40KG

5400



400W BSW Moving Head Light with CMY

POWER SUPPLY Input voltage: AC110V-240V/50-60HZ Power consumption: 430W
LIGHT SOURCE Light source specification: Imported new LED Module engine 400W
Light source life: 50000 hours Color temperature: 8000K CRI>95 **OPTICS**
Dimming system: 0-100% linear adjustment Focusing system: linear adjustment from 4 meters to 50 meters
Frost: 1 independent frost filter, soft and natural light spot Spot zoom angle: 4-35 degrees
Wash angle: 10-50 degrees High-speed strobe: 0-30 times/sec.
Adjustable speed strobe effect. Strobe macro function. **CONTROL AND PROGRAMMING**
Channel mode: 23、21channels Display mode: LCD display, key + touch dual operation mode
Control signal: International standard DMX512.
With RDM function, online software upgrade is available, dial address code **EFFEC SECTION**
Color: 8 colors + open. Color half-color function
Color mixing system: linear CMY+CTO color mixing system Fixed gobos: 12 fixed patterns + open
Rotating gobos: 7 glass patterns, each glass pattern can be independently forward and reverse
Prism system: standard single 6-facet prism and 8 prism, each prism can be independently forward and reverse
Macro function: console reset function, self-propelled mode, master-slave mode **MOVING BODY**
Horizontal scan: 540 degrees (16bit precision scan) electronic error correction
Vertical scanning: 270 degrees (16bit precision scanning) electronic error correction
Cooling method: Adopt axial fan to enhance cooling
Safety device: with electronic temperature control overheating protection, electronic temperature control
automatic power-off protection when the overheating system fails
Appearance material: high temperature resistant plastic
Working environment: -20 degrees - 40 degrees
Protection level: IP20 **WEIGHT&DIMENSION**
N.W:26KG G.W:28KG Packing size: 49*41*77cm

400W CMY图案摇头灯



输入电压: AC110V - 240V / 50 - 60HZ 光源规格: 400W LED 光源
光源寿命: 50000 小时 流明照度: 4 米 120,000 lux 额定功率: 430W
通道模式: 23 通道 水平扫描: 540 度(16 bit 精度扫描)电子纠错 垂直扫描: 270 度(16 bit 精度扫描)电子纠错
调光系统: 0 - 100 %线性调节
调焦系统: 从 4 米到 50 米线性调节 雾化系统: 1 独立雾化效果, 光斑柔和自然 放大角度: 4 - 35 度
高速频闪: 0 - 30 次/秒。 可调节速度频闪效果。 频闪宏功能
颜色: 8 色+白光。 彩色半彩色功能
调色系统: 线性 CMY + CTO 调色系统。 固定图案: 12 固定图案+白光
旋转图案: 7 个玻璃图案, 每个玻璃图案可独立正反转
棱镜系统: 标准单六列棱镜和 8 棱镜, 每个棱镜可独立正反转
宏功能: 控制台复位功能, 自走模式, 主从模式 显示方式: LCD 显示, 按键+触摸双操作模式
控制信号: 国际标准 DMX 512 具有 RDM 功能, 可在线软件升级, 拨号地址码
冷却方式: 采用轴流风机加强冷却
安全装置: 具有电子温控过热保护, 电子温控自动断电保护, 当过热系统出现故障时
外观材料: 耐高温塑料 工作环境: - 20 度 - 40 度
防护等级: IP 20 产品净重: 26KG 毛重: 28KG 包装尺寸: 49*41*77cm

T250



Moving Head LED 200W Beam Light

Input voltage: AC110V-240V/50-60Hz
Light source: 200W LED
Rated power: 250 W
Channel mode: 17CH
Color: 14 colors + white light
6-color wheel
Frost and rainbow Effect
Fixed gobo wheel: 13 gobos + white
2 Prisms: 8 prism and 24 prism, independent rotation forward and backward
Pan/Tilt movement: 540°/270°, adopting a function which resets 16bit accurately
Working mode: DMX512 control, Auto mode, master/slave mode
Display: LCD
Control signal: international standard DMX512. With the RDM function
Cooling: Active fan
Material: Aluminum, copper, steel, plastic
Working environment: -20 degrees ~ 40 degrees
Protection level: IP20 Net weight: 12kg
Packing size: 53.5*37.5*40.5cm G.W.: 15kg

200W LED光束摇头灯

单颗200W LED光源 总功率250W
色彩宏功能与半色效果
色彩丰富的彩虹效果，还可双向旋转
附带图案抖动效果，为舞台舞美增添动感
固定图案盘：13个图案加1个白圆
颜色盘：14种颜色加白光
配备可双向旋转和叠加的8棱镜及24棱镜
光束角度：2° 独立控制的雾化片
一片六彩镜 电动调焦
杰出的频闪效果，速度可变
0~100%顺滑调光 防尘、防油污设计
净重: 12kg
包装尺寸: 53.5*37.5*40.5cm
毛重: 15kg

B6



100W Beam

POWER SUPPLIE

Input power: AC100-240V 50/60 Hz

Power consumption : 150W

Led : 1 pcs 100W LED

DMX channel: 19 、 6 channels

Beam angle: 2.5 degree

Pan scan: 540° (16bit) Electric correction

Tilt scan: 270° (16bit) Electric correction

Color wheel: 13 colors+open

Static Gobo: 11 gobos+open

Effect Wheel: two Effect prism, one Rotation 16- prism, one

Rotation 8 prism effect move , Bi-directional rotation

Color chips: 1 colorful chip (6 color)

Control mode: DMX512/Master-Slave/Auto run

Dimmer : 0- 100 %

Strobe: 0-20 HZ

Display: LCD display

WEIGHT&SIZE

N.W: 11.5KG

G.W: 13KG

Packing size: 50*40*38cm

100W光束灯

◇ 电压: AC90-240V 50Hz-60Hz

◇ 通道数值: 18

◇ 水平/垂直: 540°/270°, 16bit精度扫描。

◇ 总功率: 150W

◇ 输入电压: AC 100-240 V , 50/60HZ

◇ 彩色液晶显示屏, 导航更方便

◇ 操作模式: DMX512, 主/从机

◇ 雾化: 光斑柔与自然

◇ 频闪: 电子频闪 ◇ 内置照明下显示主/从模式





◇ 颜色盘13种颜色+白光 ◇ 固定图案盘11种图案+白光

◇ 双向旋转16棱镜与8棱镜 ◇ 一个六彩效果盘

◇ 外壳: 耐高温工程塑胶+铝合金

◇ 净重: 11.5KG ◇ 毛重: 13KG

◇ 包装尺寸: 50*40*38cm

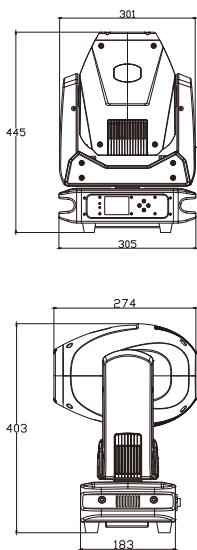

230W LED SPOT+ZOOM

POWER SUPPLIE

Input power: AC100-240V 50/60 Hz

Power consumption :260W

DMX channel:6/18 channels

Pan scan: 540° (16bit) Electric correction

Tilt scan: 270° (16bit) Electric correction

Color wheel: one color wheel, 7 kinds of color chips in one color wheel

Static Gobo: 7 gobos+open

Rotation Gobo: 7 gobos+open

Effect Wheel: two Effect prism, one Rotation six prism, one

Rotation five prism effect move , Bi-directional rotation

Lens optical system mechanical focus .beam Zoom angle 11°-25°

Control mode: DMX512/Master-Slave/Auto run

Dimmer : 0- 100 %

Strobe: 0-20 HZ

Display: LCD display

WEIGHT&SIZE

N.W: 12.5 KG

G.W: 14.5 KG

Packing size: 48.5*39*38.5cm

230W图案光束染色三合一

- ◇ 快速的LED 摇头图案光束灯。
- ◇ 通道数值: 6 与 18
- ◇ 水平/垂直: 540°/270°, 16bit精度扫描。
- ◇ 总功率: 260W
- ◇ 输入电压: AC 100-240 V , 50/60HZ
- ◇ 彩色液晶显示屏, 导航更方便
- ◇ 操作模式: DMX512, 主/从机
- ◇ 内置照明下显示主/从模式
- ◇ 颜色盘7种颜色+白光
- ◇ 固定图案盘7种图案+白光
- ◇ 旋转图案盘7种图案+白光
- ◇ 双向旋转6棱镜与5排镜
- ◇ ZOOM出光角度度11-25度
- ◇ 外壳: 耐高温工程塑胶+铝合金
- ◇ 净重: 12.5KG



230W LED SPOT+ZOOM

POWER SUPPLIE

Input power:AC100-240V 50/60 Hz

Power consumption :260W

DMX channel:6/18 channels

Pan scan: 540°(16bit) Electric correction

Tilt scan: 270° (16bit) Electric correction

Color wheel: one color wheel, 7 kinds of color chips in one color wheel

Static Gobo: 7gobos+open

Rotation Gobo:7 gobos+open

Effect Wheel: two Effect prism,one Rotation six prism,one

Rotation five prism effect move , Bi-directional rotation

Lens optical system mechanical focus .beam Zoom angle 11°-25°

Control mode:DMX512/Master-Slave/Auto run

Dimmer : 0- 100 %

Strobe:0-20 HZ

Display:LCD display

WEIGHT&SIZE





N.W: 12.5 KG

G.W: 14.7KG

Packing size: 48.5*36*40.5cm

230W图案光束染色三合一

- ◇ 快速的LED 摇头图案光束灯。
- ◇ 通道数值: 6 与 18
- ◇ 水平/垂直: 540°/270°, 16bit精度扫描。
- ◇ 总功率: 260W
- ◇ 输入电压: AC 100-240 V , 50/60HZ
- ◇ 彩色液晶显示屏, 导航更方便
- ◇ 操作模式: DMX512, 主/从机
- ◇ 内置照明下显示主/从模式
- ◇ 颜色盘7种颜色+白光
- ◇ 固定图案盘7种图案+白光
- ◇ 旋转图案盘7种图案+白光
- ◇ 双向旋转6棱镜与5排镜
- ◇ ZOOM出光角度度11-25度
- ◇ 外壳: 耐高温工程塑胶+铝合金
- ◇ 尺寸: 48.5*36*40.5cm
- ◇ 净重: 12.5KG ◇ 毛重: 14.7 KG





75W SPOT+ 9X12W WASH

POWER SUPPLIE

Input power: AC100-240V 50/60 Hz

Power consumption :200W

LED Source: 75W white + 9*12W RGBWA+UV 6in1 LEDs

Beam angle: 11°(spot)/25°(Wash)

Lamp life : 5000 hours lamp lifespan and low consumption

16/23 DMX channels

Color wheel: 7 colors+white

Gobo wheel: 6 gobos+open

Prism: 3 face

Focus: Electronic linear focus

Movement :pan 540 degree , tilt 270 degree




Control mode:DMX, Auto, Sound, Master/Slave

Display:LCD display

Dimension: 480*345*245 mm

N.W:9kg

G.W: 10kg



75W图案+9颗12W染色

◇ 输入电压： AC 100-240 V , 50/60HZ

◇ 通道数值: 16 与 23

◇ 水平/垂直: 540°/190°, 16bit精度扫描

◇ 总功率: 200W

◇ 光源1: 1颗 75W 白光灯珠

◇ 9颗12W 红绿蓝白琥珀紫光 6合1灯珠

◇ 光束角度: 11° (图案) /25°(染色)

◇ 电子调焦

◇ LCD显示屏

◇ 操作模式: DMX512, 主/从机

◇ 色片盘: 7个颜色+白光

◇ 图案盘: 6个图案+白光

◇ 3棱镜效果盘

◇ 外壳: 耐高温工程塑胶+铝合金

◇ 包装尺寸: 480*345*245 mm




◇ 净重: 9KG ◇ 毛重: 10KG

140W spot+wash led moving head

Input power: AC100-240V 50/60 Hz
 Power consumption: 170w
 Power connection: 10A
 Connection: 3pin-XLR male/female
 Extremely Long Life: 50,000 Hr and low power consumption
 Light Source: 4X10W RGBW 4-in 1 LED ring and 1 x100W white LED spot
 Focus: Motorized focus
 Beam angle of spot: 18 degree Beam angle of wash: 25 degree
 Prism: 3-face
 DMX channel: 12/16/23 channels
 Gobo1: 7+1 Gobo2: 8+1
 Gobo functions: Gobo-Flow effect, Gobo shake
 Rotation: Bi-directional
 Colors: 7+1
 Color functions: Rainbow-flow effect
 Movement: Pan/Tilt: X axis 540°, Y axis 190°
 High speed of pan/tilt movement, speed of pan/tilt movement is adjustable
 Control mode: DMX512/Master-Slave/Auto run/sound
 Display: OLED display
 8 internal program, sound mode can control by DXM 512
 IP-Rating: IP20
 N.W: 7.3 KG G.W: 9 KG Packing size : 34*29*43.5

140W图案染色灯

- ◇ 极其小巧，快速的LED 摇头图案染色灯。
- ◇ 通道数值: 12, 16 与 23
- ◇ 水平/垂直: 540°/270°, 16bit精度扫描。
- ◇ 总功率: 170W ◇ 光源 1: 单颗 100W 灯珠
- ◇ 光源 2: 4颗10W 红绿蓝白灯珠
- ◇ 输入电压: AC 100-240 V, 50/60HZ
- ◇ OLED屏 ◇ 光束角度18度 ◇ 操作模式: DMX512, 主/从机
- ◇ 内置照明下显示主/从模式 ◇ 颜色盘7种颜色+白光
- ◇ 固定图案盘8种图案+白光 ◇ 旋转图案盘7种图案+白光
- ◇ 单向旋转三棱镜 ◇ 外壳: 耐高温工程塑胶+铝合金
- ◇ 包装尺寸: 34*29*43.5cm ◇ 净重: 7.3KG ◇ 毛重: 9KG



30W SPOT+6X8W WASH

Input power:AC100-240V 50/60 Hz

Power consumption :95W

Extremely Long Life:50,000 Hr and low power consumption

LED:1PCS 30W high power white LED +6 pcs 8W RGBW LED

DMX channel:4/18channels

High speed of pan/tilt movement, speed of pan/tilt movement is adjustable

Movement:Pan/Tilt:X axis540degree, Y axis 190degree

Control mode:DMX512/Master-Slave/Auto run/sound

Display: LED display

Color wheel: 7 color + open ,rainbow -flow effect

Gobo wheel: 7 gobo +open, gobo - flow effect, gobo shake

8 internal program , sound mode can control by DXM 512

Scan position memory, auto reposition after unexpected movement

Beam angle:10 degree for spot , 25 degree is for wash.

WEIGHT&SIZE

N.W: 4.5 KG

G.W: 5.5 KG

Packing size:34*26*28cm

30W图案灯+6颗8W染色

◇ 极其小巧，快速的LED 摇头灯

◇ 通道数值:4与 18

◇ 水平/垂直: 540°/190°, 16bit精度扫描

◇ 总功率: 95W

◇ 光源: 1颗 30W 白光灯珠 + 6颗8W 红绿蓝白灯珠

◇ 输入电压: AC 100-240 V , 50/60HZ

◇ LED按键显示屏

◇ 操作模式: DMX512, 主/从机

◇ 色片盘: 7个颜色+白光

◇ 图案盘: 7个图案+白光

◇ 外壳: 耐高温工程塑胶+铝合金

◇ 包装尺寸: 34*26*28cm

◇ 净重: 4.5KG

◇ 毛重: 5.5KG



Q3



90W SPOT LED MOVING HEAD

Input power: AC 100-240V 50/60 Hz

Power consumption : 120W

LED: 1X 90W high power LED

46000 lux @ 1 m

Beam angle: 15 degree

DMX channel: 6/16 channels

Control mode: DMX512/Master-Slave/Auto run

Display: LCD display

Movement : pan 540 degree , tilt 270 degree

Color wheel: 7 color + Open

Rotating gobo wheel : 6 gobos + open (interchangeable)

Static gobo wheel : 8 gobos + open

Prism: 3 face

Focus: Electronic linear focus

WEIGHT&SIZE




N.W: 7KG

G.W: 8.6 KG

Packing size: 43*32*24cm

90W图案灯

- ◇ 极其小巧，快速的LED 摇头图案灯。
- ◇ 通道数值: 6 与 16
- ◇ 水平/垂直: 540°/270°, 16bit精度扫描。
- ◇ 总功率: 120W
- ◇ 光源: 90W 高亮白光LED 灯珠
- ◇ 输入电压: AC 100-240 V , 50/60HZ
- ◇ 旋转图案盘: 6 个图案+白光 (玻璃图案可选择)
- ◇ 固定图案盘: 8 个图案+白光
- ◇ 颜色盘: 7 个颜色+白光
- ◇ 棱镜: 可旋转的3棱镜
- ◇ 调焦: 电子线性调焦
- ◇ 彩色液晶显示屏, 导航更方便
- ◇ 操作模式: DMX512, 主/从机
- ◇ 内置照明下显示主/从模式
- ◇ 外壳: 耐高温工程塑胶+铝合金
- ◇ 尺寸: 43*32*24cm ◇ 净重: 7KG ◇ 毛重: 8.6KG





100W SPOT

POWER SUPPLIE

Input power: AC 100-240V 50/60 Hz

Power consumption : 120W

LED: 100W high power LED

Static Gobo: 7 gobos+open

Rotation Gobo: 6 gobos+open

Effect Wheel: one Rotation five-faced prism

Color wheel: one color wheel, 7 kinds of color chips in one color wheel

DMX channel: 11/16 channels

Control mode: DMX512/Master-Slave/Auto run

Display: LCD display

WEIGHT&SIZE




N.W: 6.5KG

G.W: 7.5 KG

Packing size: 42*34*29cm

100W 图案灯

- ◇ 快速的LED 摇头图案光束灯。
- ◇ 通道数值: 11 与 16
- ◇ 水平/垂直: 540°/270°, 16bit精度扫描。
- ◇ 总功率: 120W
- ◇ 输入电压: AC 100-240 V , 50/60HZ
- ◇ 彩色液晶显示屏, 导航更方便
- ◇ 操作模式: 数值512, 主/从机
- ◇ 内置照明下显示主/从模式
- ◇ 颜色盘7种颜色+白光
- ◇ 固定图案盘7种图案+白光
- ◇ 旋转图案盘6种图案+白光
- ◇ 双向旋转5棱镜
- ◇ 带雾镜
- ◇ 外壳: 耐高温工程塑胶+铝合金
- ◇ 尺寸: 42*34*29cm
- ◇ 净重: 6.5KG
- ◇ 毛重: 7.5 KG




60W SPOT LED MOVING HEAD

Input power: AC 100-240V 50/60Hz
 Power consumption : 90W
 LED Source: 60W White LED
 Lamp life : 5000 hours lamp lifespan and low consumption
 DMX channel: 5/15 channels
 Color wheel: 7 colors+white, rainbow
 Gobo wheel: 5 gobos+open, shaking
 3-facet prism
 Motorized focus
 Beam angle: 10°
 Movement : pan 540 degree , tilt 210 degree
 Control mode: Auto, Sound, DMX, Master/Slave
 Display: LED display
 Size : 320 x 250 x 255 mm (1 in 1)
 Size: 520 x 345 x 290 mm (2 in 1)
 N.W: 4kg
 G.W: 6.2kg (1 pcs)
 G.W: 12.2kg (2 pcs)

60W图案灯

工作电压/频率: 100-240V 50/60HZ
 总功率: 90W
 光源: 1个 60W 白光LED
 显示方式: LED显示屏
 运行模式: DMX控制台控制, 自走, 声控, 主/从机同步模式
 DMX 通道数: 5通道 和 15通道
 光束角度: 10度
 角度 X: 540度 Y: 210度
 光束角: 10 度
 颜色盘: 7种颜色+白光
 图案盘: 5种图案+白光
 净重: 4 KG
 毛重: 6.2 KG
 包装尺寸: 320 x 250 x 255 mm (1 in 1)

RB280

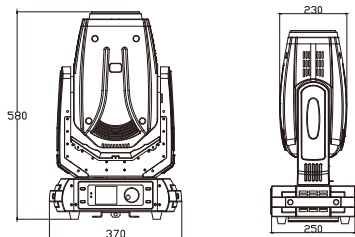



280W SPOT+BEAM+WASH

- Lamp: 280W (Color temperature: 9300K)
- Channel mode: 16 / 24 DMX512 Channel
- Pan scan: 540° (16bit) Electric correction
- Tilt scan: 270° (16bit) Electric correction
- Color wheel: one color wheel, 13 kinds of color chips in one color wheel
- Static Gobo: 14 gobos
- Rotation Gobo: 9 gobos
- Effect Wheel: one Rotation eight prism, one Rotation six prism effect move, frost
- 0-100% mechanical dimming, mechanical dimming and free dimming available.
- Strobe macro control available.
- Lens optical system achanical focus .beam angle 3.8°-20°
- Over heat protection
- Power Input: 100-240V, 50/60Hz
- Power Dissipation: 420W
- IP level :IP20
- Packing Size: 450x430x570mm
- G.W: 20 KG

280W图案光束染色三合一

- 灯泡: 280W灯泡1颗
- 光源功率: 280W
- 额定功率: 420W (高效率可靠开关电源)
- 光通量: 7950(LM), 色温: 可达9300K
- 电源: 高效率可靠开关电源 • 通道数值: 24和16通道
- 颜色盘: 一个色盘, 每个色盘由13个色片+白光组成
- 图案盘: 14个固定图案效果, 9个旋转图案效果
- 效果轮: 一个可旋转的8棱镜与一个可旋转的6棱镜
- 调光: 0-100%机械调光
- 频闪: 支持机械频闪和可调速频闪效果, 支持频闪宏功能
- 镜头组光学系统, 电动对焦, 光束角 3.8°-45°线性可调
- 采用光电复位系统, 当偶然发生误动后, 可自动检索复位
- 水平540°, 解析度 8Bit/16Bit • 垂直270°, 解析度 8Bit/16Bit
- 过热保护 • 控制模式: DMX512/主从/自动 • 防护等级: IP20
- 尺寸: 450x430x570mm • 毛重: 20 kg

Q4



200W LED SPOT+ BEAM

Input power: AC 100-240V 50/60 Hz

Power consumption : 240W

LED: 200W high power LED

DMX channel: 6/18 channels

Pan scan: 540° (16bit) Electric correction

Tilt scan: 270° (16bit) Electric correction

Color wheel: one color wheel, 7 kinds of color chips in one color wheel

Static Gobo: 8 gobos

Rotation Gobo: 6 gobos

Effect Wheel: one Effect prism

Lens optical system achanical focus .beam Zoom angle 8°/15°

Control mode: DMX512/Master-Slave/Auto run

Display: LCD display

WEIGHT&SIZE

N.W: 11 KG

G.W: 13 KG

Packing size: 47.5*35.5*38cm

200W LED 图案光束灯

◇ 极其小巧，快速的LED 摇头图案光束灯。

◇ 通道数值: 6 与 18

◇ 水平/垂直: 540°/270°, 16bit精度扫描。

◇ 总功率: 240W

◇ 光源: 200W 高亮白光LED 灯珠

◇ 输入电压: AC 100-240 V , 50/60HZ

◇ 彩色液晶显示屏, 导航更方便

◇ 操作模式: DMX512, 主/从机

◇ 内置照明下显示主/从模式

◇ 颜色盘7种颜色+白光

◇ 固定图案盘8种图案+白光

◇ 旋转图案盘6种图案+白光

◇ 双向旋转三棱镜

◇ 二级放大镜, ZOOM角度8度/15度

◇ 外壳: 耐高温工程塑胶+铝合金

◇ 尺寸: 47.5*35.5*38cm

◇ 净重: 11KG ◇ 毛重: 13KG



A8



7X40W wash zoom

POWER SUPPLIE

Input power:AC100-240V 50/60 Hz

Power consumption :320 W

LED:7 PCS 40W OSRAM high power RGBW LED

DMX channel: 12CH ,17CH

Movement:Pan/Tilt:X axis540degree, Y axis 190degree

Control mode:DMX512/Master-Slave/Auto run

Strobe macro control available

Zoom: Electronic zoom

Display:LCD display

IP level :IP20

WEIGHT&SIZE

N.W:9.2KG

G.W:11KG

Packing size: 45.5*37*32cm

7X40W调焦染色灯

◇超小，速度快，功能强大的LED摇头变焦染色光束

◇DMX通道：12/17通道模式

◇操作模式：DMX512，主/从机

◇主/从，声控模式

◇LCD液晶显示屏，导航更方便

◇完美的舞台，剧场，电视演播室，租凭和迪斯科舞厅

◇电压：AC100V-240V，50/60Hz

◇消耗功率：350W





◇灯珠：7 颗40W 欧司朗 红绿蓝白 灯珠

◇尺寸：45.5*37*32cm

◇重量：11KG



X8

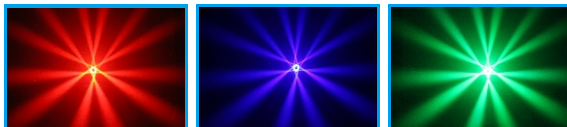

6X40W WASH ZOOM

Input power:AC100-240V 50/60 Hz

Power consumption:255watt(max)

Power connection:10A

Connection:3pin-XLR male/female

Extremely Long Life:50,000 Hr and low power consumption
LED:6 PCS 40W high power RGBW LED

DMX channel:10/17 channels

ZOOM angel:4-60°

Movement:Pan/Tilt:X axis 540°, Y axis 190°

High speed of pan/tilt movement, speed of pan/tilt movement is adjustable

Control mode:DMX512/Master-Slave/Auto run/sound

Display: 2.4inches LCD display

8 internal program , sound mode can control by DXM 512

IP-Rating:IP20

N.W: 8.5KG

G.W: 11.5KG

Packing size :44*36*32CM (1pcs/ctn)

6X40W 峰眼灯

输入电压:AC100-240V 50/60 Hz

总功率:255watt(max)

连接:3芯卡侬公母连接

灯珠: 6 颗 40W RGBW高亮白光LED

DMX 通道数:10/17通道

运行角度: 水平 540°, 垂直 190°

具有光斑放大缩小功能

显示屏: 2.4尺 LCD 彩屏

8个内置程序




IP等级:IP20

净重: 8.5KG

毛重:11.5KG

包装尺寸 :44*36*32CM (1pcs/ctn)

X7




3X40W WASH ZOOM

Input power: AC100-240V 50/60 Hz
 Power consumption: 140w
 Power connection: 10A
 Connection: 3pin-XLR male/female
 Extremely Long Life: 50,000 Hr and low power consumption
 LED: 3 PCS 40W high power RGBW LED
 DMX channel: 10/17 channels
 Movement: Pan/Tilt: X axis 540°, Y axis 190°
 High speed of pan/tilt movement, speed of pan/tilt movement is adjustable
 Control mode: DMX512/Master-Slave/Auto run/sound
 Display: OLED display
 ZOOM angel: 4-45°
 Lux@2m(4 degree) 48000
 Continuous lens rotation
 8 internal program, sound mode can control by DXM 512
 IP-Rating: IP20
 N.W: 6.5KG G.W: 7.2KG
 Packing size : 39.5*32.5*28.5cm (1pcs/ctn)

3X40W 峰眼灯

输入电压: AC100-240V 50/60 Hz
 总功率: 140watt(max)
 接口: IEC-10A
 连接: 3芯卡侬公母连接
 灯珠: 3 颗 40W RGBW高亮白光LED
 DMX 通道数: 10/17通道
 运行角度: 水平 540°, 垂直 190°
 具有光斑放大缩小功能
 显示屏: OLED屏
 8个内置程序
 IP等级: IP20
 净重: 6.5KG
 毛重: 7.2KG
 包装尺寸 : 39.5*32.5*28.5cm (1pcs/ctn)



7X15W WASH ZOOM

POWER SUPPLIE

Input power: AC100-240V 50/60 Hz

Extremely Long Life: 50,000 Hr and low power consumption

Power consumption : 95W

LED: 7 PCS 15W high power RGBW LED

DMX channel: 16 channels

Movement: Pan/Tilt: X axis 540 degree, Y axis 190 degree

High speed of pan/tilt movement, speed of pan/tilt movement is adjustable

Control mode: DMX512/Master-Slave/Auto run/sound

Display: LED display

Scan position memory, auto re-position after unexpected movement

8 internal program, sound mode can control by DMX 512

WEIGHT&SIZE

N.W: 4.5KG

G.W: 5.5KG

Packing size : 34*26*28cm

7X15W调焦染色灯

◇ 超小，速度快，功能强大的LED摇头光束，带调焦功能

◇ 消耗功率：95W

◇ 电压：AC100V-240V，50/60Hz

◇ 灯珠：7颗15W红绿蓝白灯珠

◇ DMX通道：16通道模式

◇ 水平/垂直：540°/190°，16bit精度扫描

◇ 操作模式：DMX512，主/从机

◇ 内置照明下显示主/从模式

◇ LED按键显示屏

◇ 完美的舞台，剧场，电视演播室，租赁和迪斯科舞厅

◇ 尺寸：34*26*28cm

◇ 净重：4.5KG

◇ 毛重：5.5KG

5250



250W BSW led moving WITH ZOOM

POWER SUPPLIE

POWER SUPPLIE

Input power: AC 100-240V 50/60 Hz

Power consumption :250W

DMX channel:17/20 channels

Pan scan: 540° (16bit) Electric correction

Tilt scan: 270° (16bit) Electric correction

Color wheel: one color wheel, 9 kinds of color chips in one color wheel

Static Gobo: 11 gobos+open

Rotation Gobo: 8 gobos+open

Effect Wheel: 3 faced prism, Bi-directional rotation

Lens optical system mechanical focus .beam Zoom angle 7° -35°

Control mode: DMX512/Master-Slave/Auto run/ RDM

Dimmer : 0- 100 %

Strobe: 0-20 HZ

Display: LCD display

WEIGHT&SIZE

N.W: 13.5 KG G.W: 15.5 KG

Packing size: 52*41.5*37cm

250W图案光束染色三合一

- ◇ 快速的LED 摇头图案光束灯。
- ◇ 通道数值: 17 与 20
- ◇ 水平/垂直: 540°/270°, 16bit精度扫描。
- ◇ 总功率: 250W
- ◇ 输入电压: AC 100-240 V , 50/60HZ
- ◇ 彩色液晶显示屏, 导航更方便
- ◇ 操作模式: DMX512, 主/从机
- ◇ 内置照明下显示主/从模式
- ◇ 颜色盘9种颜色+白光
- ◇ 固定图案盘11种图案+白光
- ◇ 旋转图案盘8种图案+白光
- ◇ 双向旋转3棱镜
- ◇ ZOOM出光角度度7-35度
- ◇ 外壳: 耐高温工程塑胶+铝合金
- ◇ 净重: 13.5KG
- ◇ 毛重: 15.5KG
- ◇ 包装尺寸52*41.5*37cm

W6-2



19X15W WASH ZOOM

- ◇ Extremely small, fast and powerful LED moving beam.
- ◇ DMX Channels: 13 /24 channels mode
- ◇ Operation modes: DMX512, Master/Slave
- ◇ Great built-in lighting shows under Master/Slave mode
- ◇ Blue LCD display for easy navigation
- ◇ Perfect for stage, theater, TV studio, rental and discotheques
- ◇ Voltage: AC 100V~240V, 50/60Hz
- ◇ Power consumption: 300W
- ◇ LED: 19 X 15W RGBW LED
- ◇ Dimension: 46*41*33cm
- ◇ Weight: 9.7Kgs
- ◇ Beam Angel: 6 ~50

19X15W 调焦染色灯

- ◇ 超小，速度快，功能强大的LED摇头光束，带ZOOM功能。
- ◇ DMX通道：13 与 24通道模式
- ◇ 操作模式：DMX512，主/从机
- ◇ 内置照明下显示主/从模式
- ◇ 彩色液晶显示屏，导航更方便
- ◇ 完美的舞台，剧场，电视演播室，租凭和迪斯科舞厅
- ◇ 电压：AC100V-240V，50/60Hz
- ◇ LED：19 X15W RGBW LED
- ◇ 尺寸：46*41*33cm
- ◇ 重量：9.7Kgs
- ◇ 调焦角度：6-50

A37



37x15W LED ZOOM WASH

POWER SUPPLIE

Input power: AC100-240V 50/60 Hz

Power consumption :520 W

LED:37 PCS 15W RGBW 4 in 1 LED

DMX channel: 24CH ,48CH

Movement: Pan/Tilt: X axis 540 degree, Y axis 190 degree

Control mode: DMX512/Master-Slave/Auto run

Strobe macro control available

Beam angle: 8-50 degree motorized zoom

Display: LCD display with 5 buttons

RDM function

Effect : 7- section control

1-100% linear dimmer

0-25 Hz electronic strobe

IP level : IP20

Powercon in & out , 3Pin or 5 Pin in/out

WEIGHT&SIZE

N.W:12.7KG

G.W:15KG

Packing size: 47.5*36*49.5cm

37X15W光束染色摇头灯

◇ 37颗15W RGBW 四合一LED

◇ 通道数值: 24与 48

◇ 水平/垂直: 540°/270°, 16bit精度扫描。

◇ 总功率: 500W

◇ 光束角度: 8-38度

◇ 输入电压: AC 100-240 V , 50/60HZ

◇ 彩色液晶显示屏, 导航更方便

◇ 操作模式: DMX512, 主/从机

◇ 内置照明下显示主/从模式

◇ 外壳: 耐高温工程塑胶+铝合金

◇ 尺寸: 47.5*36*49.5cm

◇ 净重: 12.7 Kg

◇ 毛重: 15KG



12x40W LED ZOOM WASH

POWER SUPPLIE

Input power: AC100-240V 50/60 Hz

Power consumption :500 W

LED:12PCS 40W high power RGBW 4 in 1 LED

DMX channel: 11CH ,17CH , 18CH , 25CH

Movement:Pan/Tilt:X axis540degree, Y axis 190degree

Control mode:DMX512/Master-Slave/Auto run

Strobe macro control available

Beam angle:5-50 degree motorized zoom

Display:LCD display with 5 buttons

RGBW color mixing

Pixel mapping

IP level :IP20

WEIGHT&SIZE

N.W:14KG

G.W:16KG

Packing size: 46*36*49cm

12X40W光束染色摇头灯

- ◇ 12颗40W RGBW 四合一LED
- ◇ 通道数值: 11、17、18与25
- ◇ 水平/垂直: 540°/270°, 16bit精度扫描。
- ◇ 总功率: 500W
- ◇ 光束角度: 5-50度
- ◇ 输入电压: AC 100-240 V , 50/60HZ
- ◇ 彩色液晶显示屏, 导航更方便
- ◇ 操作模式: DMX512, 主/从机
- ◇ 内置照明下显示主/从模式
- ◇ 外壳: 耐高温工程塑胶+铝合金
- ◇ 尺寸: 46*36*49cm
- ◇ 净重: 14KG
- ◇ 毛重: 16KG

A740




7x40W LED ZOOM WASH

Input power: AC100-240V 50/60 Hz
Power consumption: 300W (max)
Power connection: 7A
Connection: 3pin-XLR male/female
Extremely Long Life: 50,000 Hr and low power consumption
LED: 7 PCS 40W high power RGBW LED
DMX channel: 51/23/35 channels
ZOOM angle: 6-50°
Movement: Pan/Tilt: X axis 540°, Y axis 270°
High speed of pan/tilt movement, speed of pan/tilt movement is adjustable
Control mode: DMX512/Master-Slave/Auto run/sound
Display: LCD display
IP-Rating: IP20
N.W: 11.5KG
G.W: 14.5KG
Packing size: 52*43*36cm

7X40W光束染色摇头灯

7x40W 蜂眼光束染色摇头灯
输入电压: AC100-240V 宽电压 50/60 Hz
总功率: 300W
信号连接: 3pin-XLR公/母
光源: LED 7颗40W欧司朗RGBW 光源寿命50,000小时
DMX通道: 51/23/35通道
变焦角度: 6-50°
水平/垂直: X轴540°, Y轴270°
移动速度快, 水平/垂直移动速度可调节
控制模式: DMX512 /从机/内置运行/声控激发
显示屏: LCD显示屏
IP评级: IP20
N.W: 11.5kg
G.W: 14.5kg
包装尺寸: 52*43*36cm (1pcs / ctn)

A1940

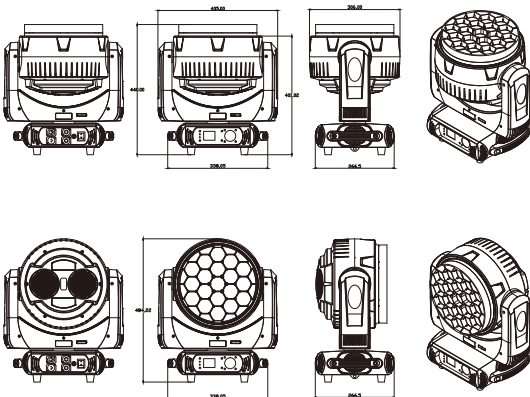

19x40W LED BEAM ZOOM WASH

Input power: AC100-240V 50/60 Hz
 Power consumption: 760Watt(max)
 Light source: 19 40W four-in-one OSRAM LED lamp beads
 Light strip: 5050RGB 74PCS 0.12W Symphony side-emitting light strip
 Color temperature: 2800K-8500K
 Lamp bead life: 50000 hours
 Display: color screen
 Power connection: 7A
 Connection: 3pin-XLR male/female
 Extremely Long Life: 50,000 Hr and low power consumption
 LED: 19 PCS 40W high power RGBW LED
 DMX channel: 24CH/26CH/38CH/81CH/95CH/100CH/102CH
 ZOOM angel: 6-50°
 Movement: Pan/Tilt: X axis 540°, Y axis 270°
 High speed of pan/tilt movement, speed of pan/tilt movement is adjustable
 Control mode: DMX512/Master-Slave/Auto run/sound
 Display: LCD display
 Functional Effects: With CTO, Dyeing, Beam, Effect Modes (Swirl, Kaleidoscope)
 The front mirror plate can be rotated in a variable direction, and the mirror plate can be seamlessly spliced. Aspherical lens structure, single LED control
 Light strip effect: strobe, horse racing effect, with built-in program
 IP-Rating: IP20
 Packing size: 58*55*38cm N.W: 18kg G.W: 20KG

19X40W调焦蜂眼光束灯

19X40W 蜂眼光束染色摇头灯
 输入电压: AC100-240V宽电压 50/60 Hz
 总功率: 760W 信号连接: 3pin-XLR公/母
 光源: 19颗40W RGBW灯珠 光源寿命50,000小时
 DMX通道: 24CH/26CH/38CH/81CH/95CH/100CH/102CH
 变焦角度: 8-50°
 功能效果: 有CTO、染色、光束、效果模式(漩涡、万花筒)
 前镜板可以可变方向旋转, 镜板可以无缝拼接。非球面透镜结构, 单灯珠点控制
 光带效果: 频闪, 跑马效果, 内置程序
 水平/垂直: X轴540°, Y轴270°
 移动速度快, 水平/垂直移动速度可调节
 控制模式: DMX512 /从机/内置运行/声控激发
 显示屏: LCD显示屏
 IP评级: IP20
 净重: 18KG 毛重: 20KG 包装尺寸: 58*55*38cm



7X40W WASH ZOOM

Input power: AC100-240V 50/60 Hz
 Power consumption: 300watt(max)
 Connection: 3pin-XLR male/female
 Extremely Long Life: 50,000 Hr and low power consumption
 LED: 7 PCS 40W high power RGBW LED
 DMX channel: 12/18 channels
 ZOOM angel: 6-55 °
 Movement: Pan/Tilt: X axis 540°, Y axis 270°
 High speed of pan/tilt movement, speed of pan/tilt movement is adjustable
 Control mode: DMX512/Master-Slave/Auto run/sound
 Display: LCD display
 IP-Rating: IP20
 N.W: 5.9 KG
 G.W: 7 KG
 Packing size : 40x25x32cm

7X40W 调焦峰眼

7X40W 峰眼光束染色摇头灯
 输入电压: AC100-240V宽电压 50/60 Hz
 总功率: 300W
 信号连接: 3pin-XLR公/母
 光源: LED 7颗40W RGBW 光源寿命50,000小时
 DMX通道: 12/18通道
 变焦角度: 6-55°
 水平/垂直: X轴540°, Y轴270°
 移动速度快, 水平/垂直移动速度可调节
 控制模式: DMX512 /从机/内置运行/声控激发
 显示屏: LCD显示屏
 IP评级: IP20
 N.W: 5.9 kg
 G.W: 7 kg
 包装尺寸: 40x25x32cm



W740



7X40W WASH ZOOM

Input power: AC 100-240V 50/60 Hz
Power consumption: 300W (max)
Connection: 3pin-XLR male/female
Extremely Long Life: 50,000 Hr and low power consumption
LED: 7 PCS 40W high power RGBW LED
DMX channel: 11/17 channels
ZOOM angle: 6-55°
Movement: Pan/Tilt: X axis 540°, Y axis 270°
High speed of pan/tilt movement, speed of pan/tilt movement is adjustable
Control mode: DMX512/Master-Slave/Auto run/sound
Display: LCD display
IP-Rating: IP20
N.W: 5.9 KG
G.W: 7 KG
Packing size: 40x25x32cm

7X40W 调焦染色灯

输入电压: AC100-240V 宽电压 50/60 Hz
总功率: 300W
信号连接: 3pin-XLR公/母
光源: LED 7颗40W RGBW 光源寿命50,000小时
DMX通道: 11/17通道
变焦角度: 6-55°
水平/垂直: X轴540°, Y轴270°
移动速度快, 水平/垂直移动速度可调节
控制模式: DMX512 /从机/内置运行/声控激发
显示屏: LCD显示屏
IP评级: IP20
N.W: 5.9 kg
G.W: 7 kg
包装尺寸: 40x25x32cm

53



53-I



150W Scanner

Power supply: AC 90- 240 V ,50 - 60 Hz
Light source: 120 W LED
Power consumption :150W
Colour temperature: 7500 K
Repetition rate: 4.43k Hz
Beam angle: 12°
Gobo wheel with 6 gobos + open, rotating & shaking
Colour wheel with 7 colours + white , rainbow
3-facet prism
PAN movement: 180°
TILT movement: 120°
0-100% linear dimmer
Control: DMX (8/14 channels)
4 working modes: DMX , Auto , Sound , Master / Slave
Sound control
4-button OLED display
Motorized focus
DMX input and output: XLR 3pin
powerCON input/output
Temperature controlled fan
packing size: 55*33*32cm
N.W: 7.5 kg G.W: 8.5KG

150W Barrel

Power supply: AC 90- 240 V ,50 - 60 Hz
Light source: 120 W LED
Power consumption :150W
Colour temperature: 7500 K
Repetition rate: 4.43k Hz
Beam angle: 12°
Gobo wheel with 6 gobos + open, rotating & shaking
Colour wheel with 7 colours + white , rainbow
3-facet prism
PAN movement: 180°
TILT movement: Endless
0-100% linear dimmer
Control: DMX (8/14 channels)
4 working modes: DMX , Auto , Sound , Master / Slave
Sound control
4-button OLED display
Motorized focus
DMX input and output: XLR 3pin
powerCON input/output
Temperature controlled fan
Packing size: 55*33*32cm N.W: 8 kg G.W: 9.5KG

PAR LIGHT

SERIES 帕灯



PAR

LED lamp, that is, LED as a light source of a lighting fixture. The name of the lamp is originated from foreign par can, the meaning of spot light, LED lamp and traditional lamp, with more rich color effect, the mixed color effect of three-color lamp beads as much as 16.7 million kinds.

E03



150W studio light

Light source: 150 Watt LED
Colour temperature: 2900 K
Master / Slave, manual control via display
DMX input and output: XLR 3-pin
Power input: Power Twist
Power supply: 100 - 240 V ~ 50/60 Hz
Power consumption: 150 watts
Protection class: IP20
Housing made of die-cast aluminium
Dimensions without barn door and bracket raised (W x H x D): 193 x 265 x 152 mm
Weight: 2.9 kg
Colour: Black

Y06



6X40W ZOOM Bar light

Input voltage : AC90-240V,50/60HZ
Power consumption : 240W
Light Source: 6X40W RGBW 4 in 1 LED
Channel : 14/15/27/39CH
High speed of pan/tilt movement, speed of pan/tilt movement is adjustable
Control mode:DMX512/Master-Slave/Auto run/sound
Display: LCD display
Dimmer :1-100 % dimmer
Zoom angle : 5-45degree
Production size : 670×180×350mm
N.W : 8.5KG
G.W : 10KG

DIO



100W Vintage light

1 × 80W 2000K COB LED as strobe
72 × LED RGB SMD, 0.5 W ambient, 6 segments controlling.
DMX channels: 5, 8, 21.
OLED display with touching buttons.
PowerCON in & out.
Display on the back
DMX input and output: 3 pin XLR
Power input and output: Power Twist
Power supply: 100 - 240 V AC 50-60 Hz
Max. power consumption: 100 W
Protection class: IP20
Housing: Aluminium

DII



200W Vintage light

3 × 80W 2000K COB LED as strobe
48 × 3W LED RGB SMD ambient, 6 segments controlling.
DMX channels: 5, 10, 23. 25CH.
OLED display with touching buttons.
PowerCON in & out.
Display on the back
DMX input and output: 3 pin XLR
Power input and output: Power Twist
Power supply: 100 - 240 V AC 50-60 Hz
Max. power consumption: 200 W
Protection class: IP20
Housing: Aluminium

F30



720 par light

Light source: 7x 20 Watt 6in1 RGBLAC LED

Beam angle: 25°

Control: DMX (2/3/6/9/11 channels)

master / slave, integrated programmes and colour macros,
8 storable user colours

OLED display with touch-sensitive buttons

DMX input and output: XLR 3-pin IP65

Power supply: 100 - 240 V ~ 50/60 Hz

Maximum power consumption: 140 watts

Black die-cast aluminium housing

Pressure equalisation valve for long service life

Dimensions with bracket (L x W x H): 280 x 115 x 310 mm

F3 I



420 par light

Light source: 4x 20 Watt 6in1 RGBLAC LED

Beam angle: 25°

Control: DMX (2/3/6/9/11 channels)

master / slave, integrated programmes and colour macros,
8 storable user colours

OLED display with touch-sensitive buttons

DMX input and output: XLR 3-pin IP65

Power supply: 100 - 240 V ~ 50/60 Hz

Maximum power consumption: 80 watts

Black die-cast aluminium housing

Pressure equalisation valve for long service life

Dimensions with bracket (L x W x H): 230 x 115 x 235 mm

D07



25*12W MATRIX

LIGHT SOURCE

LEDs: 25x12Watt, 4in1 RGBA/RGBW LED

Beam angle: 25

Pixel control

Control mode: DMX, Sound, Auto run and Master/Slave

DMX Channels: 1/4/5/25/75/100/105 CH

3/5pin XLR DMX in&out

Power consumption: Max. 300W

Power supply: AC100V-240V, 50/60Hz (auto-ranging)

Fuse: F5A 250V

Carton Size: 630(L)*630(W)*170(H)mm

Net weight: 13kg

D17



36*15W 6x6 MATRIX

Voltage: AC100V-240V/ 50-60HZ

LED: 36x15W RGBW 4IN1

LED Lifespan: 50000hours

Control mode: DMX512, Auto-run, master-slave, sound control, RDM.

Channel: channel selection CH04, CH12, CH144

Dimming: 32bit 0~100% linear dimming

Features: wash+strobe

Operating temperature: - 30 °C~50 °C

Stroboscopic frequency: 1~30HZ

Appearance: metal, black

Connection mode: DMX512 input/output/power input/output.

IP grade: IP20

product size: 500×500×185mm

packing size: 560×560×250mm

N.W: 10.5Kg

G.W: 12.0Kg

F09



400W four eye blinder light

Voltage:AC90V-245V
Frequency:50-60Hz
Power Consumption:400W
Light source:4pcs 100W white+Warm white 2in1 COB Leds
Light Color:White or Warm White
Led control: individual controllable
Lifetime:60,000 hours
Color Temp.:2500K/3200K/6500K
Dimmer:0~100% linear adjustable
Beam Angle:38degree
Working temperature: -30°C~50°C
Control mode:DMX512,Master/Slave, Auto Run, Stand alone, Sound active
Strobe effect: Variable speed (1-30Hz)
House Material:Metal
House Color:Black
Data : XLR IN/OUT Power IN / OUT
IP Grade:IP65
Weight:15.2 kg

F10



200W two eye blinder light

Voltage:AC90V-245V
Frequency:50-60Hz
Power Consumption:250W
Light source:2pcs 100W white+Warm white 2in1 COB Leds
Light Color:White or Warm White
Led control: individual controllable
Lifetime:60,000 hours
DMX Channel:4/8CH
Color Temp.:2500K/3200K/6500K
Dimmer:0~100% linear adjustable
Beam Angle:38degree
Working temperature: -30°C~50°C
Control mode:DMX512,Master/Slave, Auto Run, Stand alone, Sound active
Strobe effect: Variable speed (1-30Hz)
House Material:Metal
House Color:Black
Data : XLR IN/OUT Power IN / OUT
IP Grade:IP65
Weight:9.5 kg



更多详情访问
高义光电科技官网



<http://www.yiqilight.com>

地址：广州市白云区石井镇大冈东街30号月昌工业区B栋2-4楼

Addr.:NO.B,Yuechang industrial Zone ,Shijing Town ,Baiyun District,Guangzhou.China